

Scotch Extremium All Weather duct tape

Description



Scotch Extremium All Weather duct tape is a multi-purpose duct tape for outdoor applications and indoor also. This product resists drying, cracking, and peeling from the damaging effects of UV rays in sunlight. This tape will last up to three times longer than other grey heavy duty duct tapes**.

Product Characteristics	
Backing	Waterproof, polyethylene coated cloth scrim
Adhesive	Rubber resin
Standard Roll length	48mm x 27m (30 yards)
Temperature resistance	0°C to 93°C
Color	Dark grey

Typical Physical Properties	value	Method
Total thickness	228 µm	ASTM D-3652
Adhesion to steel	6.6 N/cm	ASTM-D3330
Tensile strength	49 N/cm	ASTM-D3759
Elongation at break	18 %	ASTM-D3759

The values displayed are the result of illustrative lab test measures made according to the indicated external norm and shall not be considered as a commitment from 3M

Storage

To obtain best performances, store this product under normal condition of 21°C and 50% relative humidity in the original packaging and use it within one year from date of purchase.

Warning

Apply above 10°C and up to 70°C-

Do not use on wallpaper or other delicate surfaces, Do not use on poorly bonded surfaces

In case of doubt, test before use


3M Construction & Home Improvement Markets Product Information Sheet

Features/Advantages/Benefits

Features	Advantages	Benefits
Rubber resin	High initial tack	Stick easily to the surface
	Very Good holding power Long lasting, 3 times longer**	Helps resist lifting or curling, longer temporary repairs
PE coated cloth scrim Specific backing designed for outdoor	Water proof baking* Temperature resistant up to 93°C	Weather resistant Long lasting in outdoor weather conditions
Narrow scrim	Better resistance	Larger range of application
	Hand tearable both direction	Easy handling

**Resists 3 times longer than other 3M duct tapes.

* Not suitable for water leaks repairs.

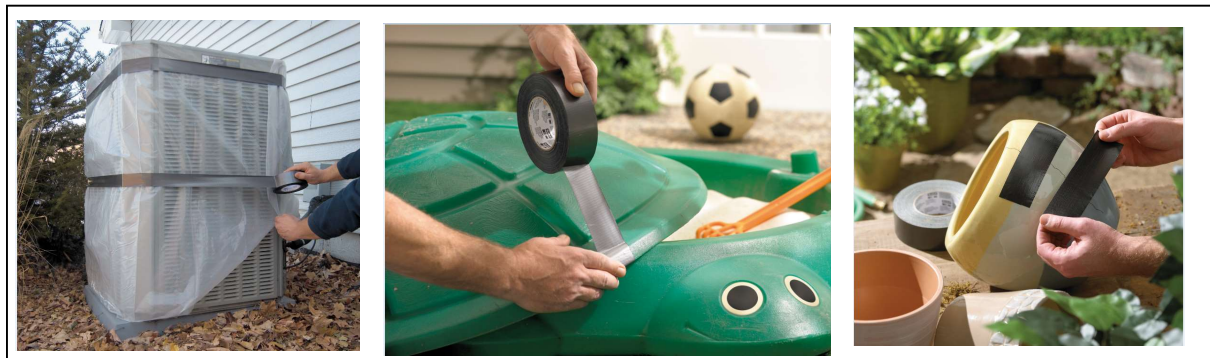

Important notice :

The use of the 3M product described within this document assumes that the user has read and understood the user notice. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected purpose.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the 3M product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M group (which cannot verify or control those elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for 3M products are determined with the sales contract documents and with the mandatory and applicable clause, excluding any other warranty or compensation